



DETAILS

Suggested minimum number of modules for free-floating applications

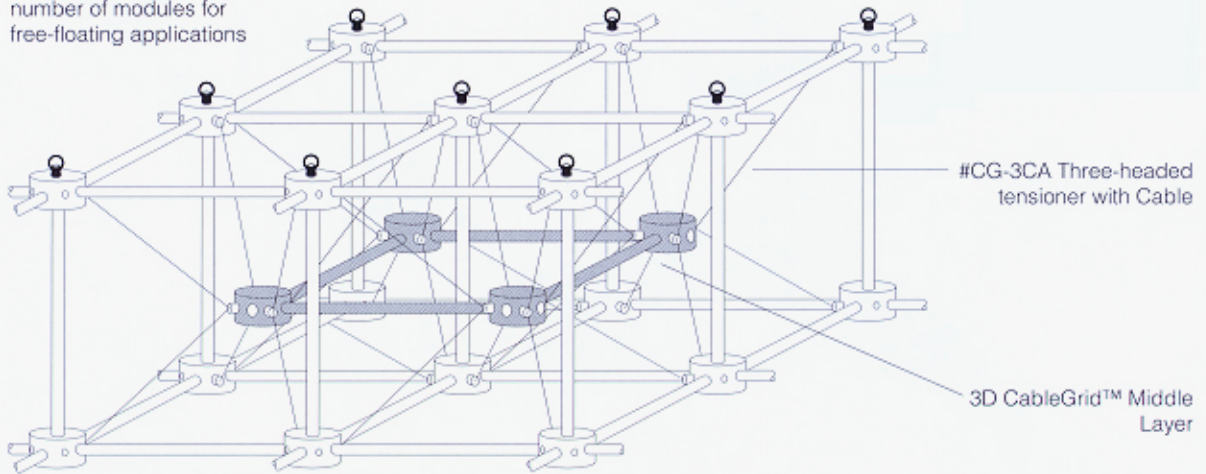

3D CABLEGRID™ SECTION WITH LIGHT TRACK AND TWO-DIMENSIONAL CABLEGRID EXTENSIONS

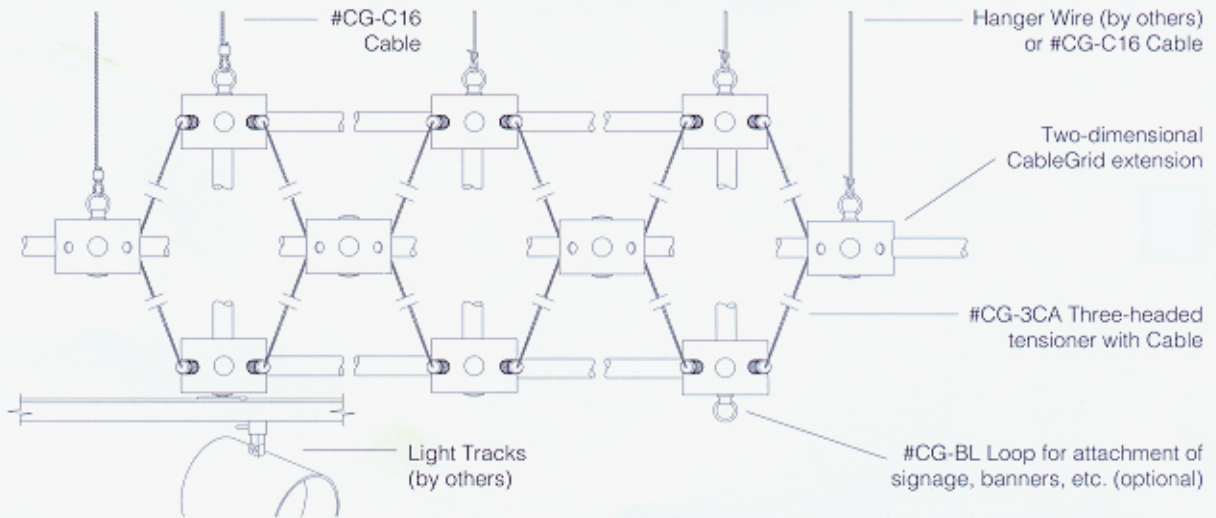

APPLICATION DATA

For application data, material data and module sizes, please refer to your CableGrid Fact Sheet.

SUGGESTED SPECIFICATIONS

Furnish and install 3D CableGrid Ceiling System (#CG-24, #CG-30, #CG-36, #CG-48, #CG-60) manufactured by Ceiling Designs, Inc., and represented by (name, city and phone number of CDI sales representative) in all locations shown on the Plans.

Finishes: Tubes and Hubs shall be in Standard White. Hub hardware shall be in Standard (Cadmium, Natural Brass).

Custom Finishes: Custom finishes are available upon request.

Hanging System: Each Hub of the top layer shall be supported from the structure above by means of (#12 Pre-straightened Steel Hanger Wire secured to #CG-BL Loop using three tight wrappings) or (#CG-C16 Stainless Steel Cable attached securely top and bottom using #CG-SW Swedges (please refer to your CableGrid Fact Sheet

for recommended tools). All hangers shall drop plumb. Where plumb hangers are not possible, please refer to the manufacturer's *Installation Instructions* for directions.